

# specifications

## RF7.UPF.1.SD

ReFlex Series, 1 Solid Door, Upright Freezer



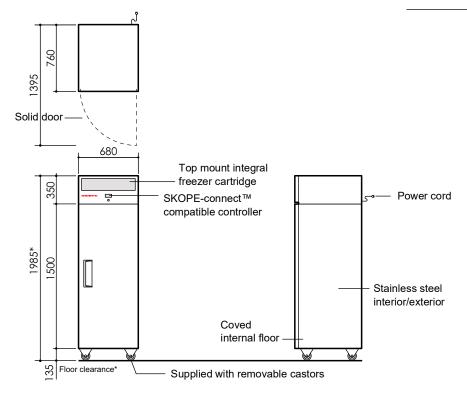

### **CABINET**

Doors 1 × self-closing, lockable, reversible, solid swing door. Supplied RH

Internal door opening 1 × door openings: 1375 mm high × 555 mm wide

Shelves 5 × adjustable height shelves: 540 mm wide × 530 mm deep

Worktop

Material 304 AISI stainless steel interior and exterior

### **PERFORMANCE**

Max. ambient temp. 40°C

Temperature range -21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)

GEMS class

GEMS energy consumption 7.40 kWh/24 h

GEMS annual running cost \$811 p.a. (@ \$0.30/kWh)

#### **ELECTRICAL**

Electrical safety climate class | 5

Interior lighting 1 × 1200 mm, 12W LED light (door activated) Power cord Supplied with a 10 amp plug and 2 m lead Power supply 220-240 volts a.c. 50 Hz, single phase supply

Current draw 4.0 amps (includes unit 3.9 amps)

#### REFRIGERATION

Controller SCS Connect (SKOPE-connect<sup>™</sup> compatible)

Connectivity interface Bluetooth wireless technology

Refrigeration system Top mounted, integral, removable freezer cartridge (part number

UTKDNI-0019)

R290/94 g (natural refrigerant) Refrigerant

Nominal capacity 550 watts

Heat rejection (avg/peak) 310 watts/430 watts Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

	External	Internal
Height	1985 mm*	1395 mm
Width	680 mm	560 mm
Depth	760 mm	600 mm
Floor area	0.52 m <sup>2</sup>	
Weight	122 kg	

469 L Gross volume Net volume 363 L

**DIMENSIONS** 

<sup>\*</sup> With supplied castors fitted. See height variation below

Height variation		
Supplied castors	1985 mm	
Height adjustable legs	1995 to 2035 mm	
No castors or legs	1850 mm	

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5 mm			
More than 1 metre	-5 mm to +10 mm  Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5 mm	+15 mm		
More than 1 metre	-5 mm to +10 mm	+15 mm		

Ventilation requirements	
Тор	300 mm
Sides	Not required
Back	Not required
Bottom	Not required

