


specifications

RF7.UPF.2.SD

ReFlex Series, 2 Solid Door Upright Freezer (R290)

Project: _____

Item No: _____

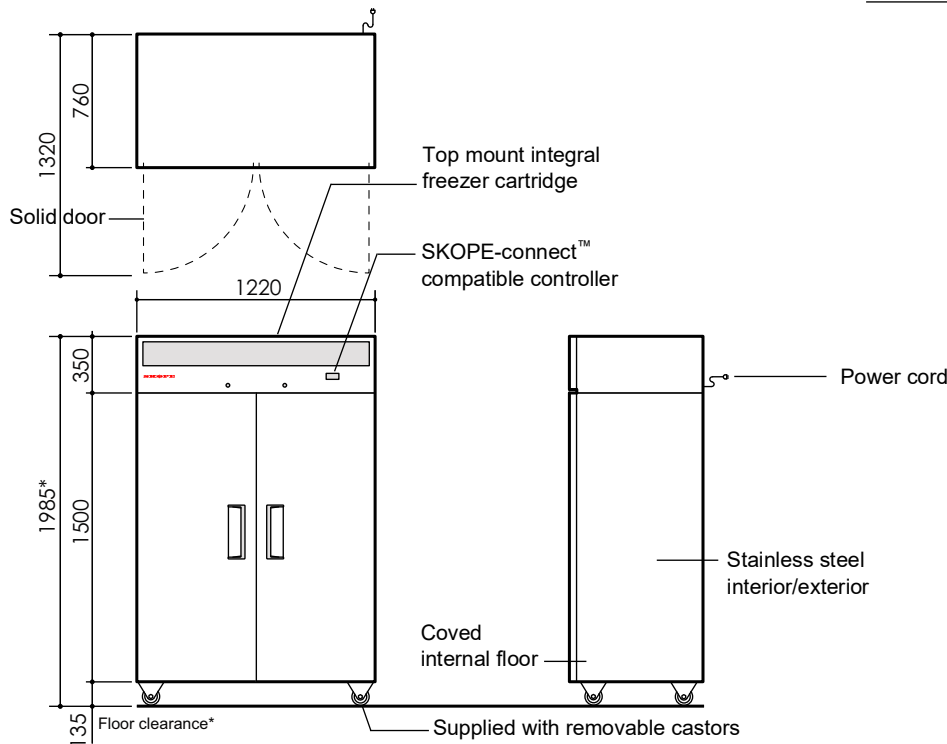

CABINET

Doors	2 × self-closing, lockable, solid swing doors, left and right hand
Internal door opening	2 × door openings: 1375 mm high × 495 mm wide
Shelves	10 × adjustable height shelves: 530 mm wide × 530 mm deep
Worktop	n.a.
Material	304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp.	40°C
Temperature range	-21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)
GEMS class	5L1
GEMS energy consumption	10.64 kWh/24h
GEMS annual running cost	\$1165 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class	5
Interior lighting	2 × 1200 mm, 12W LED light (door activated)
Power cord	Supplied with 10 amp plug and 2 m lead
Power supply	220-240 volts a.c. 50 Hz, single phase supply
Current draw	5.0 amps (includes unit 4.6 amps)

REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Top mounted, integral, removable freezer cartridge (part number UTKDNI-0037)
Refrigerant	R290/105 g (natural refrigerant)
Nominal capacity	725 watts
Heat rejection (Avg/peak)	450 watts/725 watts
Drainage	No plumbing required

DIMENSIONS

	External	Internal
Height	1985 mm*	1395 mm
Width	1220 mm	1100 mm
Depth	760 mm	600 mm
Floor area	0.93 m ²	
Weight	171 kg	
Gross volume	921 L	
Net volume	712 L	

* With supplied castors fitted. See height variation below

Height variation

Supplied castors	1985 mm
Height adjustable legs	1995 to 2035 mm
No castors or legs	1850 mm

Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5 mm	
More than 1 metre	-5 mm to +10 mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	+15 mm

Ventilation requirements

Top	300 mm
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2020 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673
Email: skope@skope.com, Website: www.skope.com

PSS0679 Rev. 1.6 Apr. 2023

