


specifications

RF6.UBF.1.SD

ReFlex Series, 1 Solid Door Underbench Freezer

Project: _____

Item No: _____

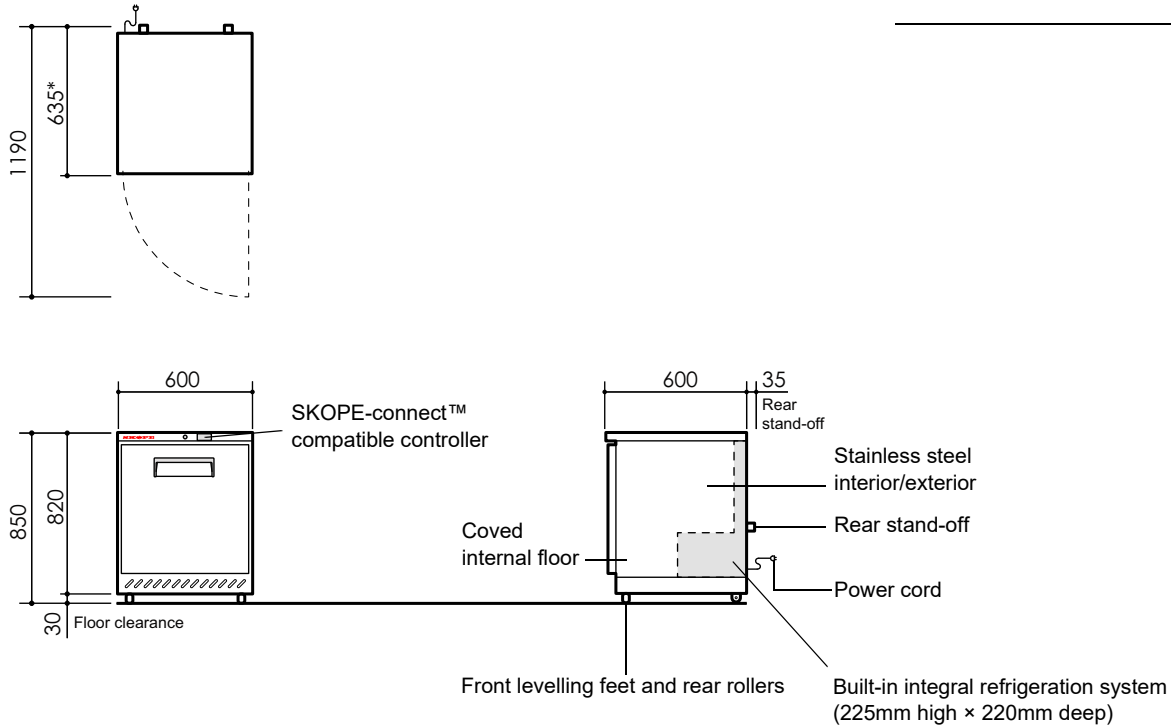

| | |
|---------------------------------|---|
| CABINET | |
| Door | 1 × self-closing, lockable, reversible, solid swing door (hinged right hand) |
| Internal door opening | 1 × door opening: 645 mm high × 485 mm wide |
| Shelves | 3 × shelves: 2 × adjustable height and 1 × floor mounted Top and middle adjustable height shelves: 480mm wide × 350 mm deep Bottom floor mounted shelf: 480 mm wide × 180 mm deep |
| Worktop | n.a. |
| Material | 304 AISI stainless steel interior and exterior |
| PERFORMANCE | |
| Max. ambient temperature | 30°C |
| Temperature range | -21°C to -18°C (adjustable with SKOPE-connect™ -26°C to -12°C) |
| GEMS class | 4L1 |
| GEMS energy consumption | 4.84 kWh/24 h |
| GEMS annual running cost | \$530 p.a. (@ \$0.30/kWh) |
| ELECTRICAL | |
| Electrical safety climate class | 4 |
| Interior lighting | n.a. |
| Power cord | Supplied with 1.6 m, 10 amp plug and lead |
| Power supply | 220-240 volts a.c. 50 Hz, single phase supply |
| Current draw | 1.5 amps |
| REFRIGERATION | |
| Controller | SCS Connect (SKOPE-connect™ compatible) |
| Connectivity interface | Bluetooth wireless technology |
| Refrigeration system | Built-in, integral, freezer system |
| Refrigerant | R290/45 g (natural refrigerant) |
| Nominal capacity | 250 watts |
| Heat rejection (avg/peak) | 200 watts/205 watts |
| Drainage | No plumbing required |

| | | |
|-------------------|---------------------|----------|
| DIMENSIONS | | |
| | External | Internal |
| Height | 850 mm | 655 mm |
| Width | 600 mm | 495 mm |
| Depth | 635 mm* | 450 mm |
| Floor area | 0.38 m ² | |
| Weight | 52 kg | |
| Gross volume | 146 L | |
| Net volume | 94 L | |

* Depth 635 mm includes 35 mm rear stand-off

| | | |
|--|------------------------------------|-------------------------|
| Dimensional tolerances | | |
| Before installing this cabinet allow the following dimensional tolerances: | | |
| Linear dimensions | Overall cabinet dimensions | |
| Less than 1 metre | ±5 mm | |
| More than 1 metre | -5 mm to +10 mm | |
| | Length of multiple cabinets | |
| | At each joint | At each end wall |
| Less than 1 metre | ±5 mm | +15 mm |
| More than 1 metre | -5 mm to +10 mm | +15 mm |

| | |
|---------------------------------|------------------------------------|
| Ventilation requirements | |
| Top | Not required |
| Sides | 50 mm each side |
| Back | 35 mm (provided by rear stand-off) |
| Bottom | 30 mm (provided by feet) |

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2021 SKOPE Industries Limited

PSS0664 Rev. 1.4 Nov. 2022

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

