


# specifications

## RF8.PPZ.3.SD

### ReFlex Series, 3 Solid Door Medium Pizza Preparation Fridge

Project: \_\_\_\_\_  
Item No: \_\_\_\_\_

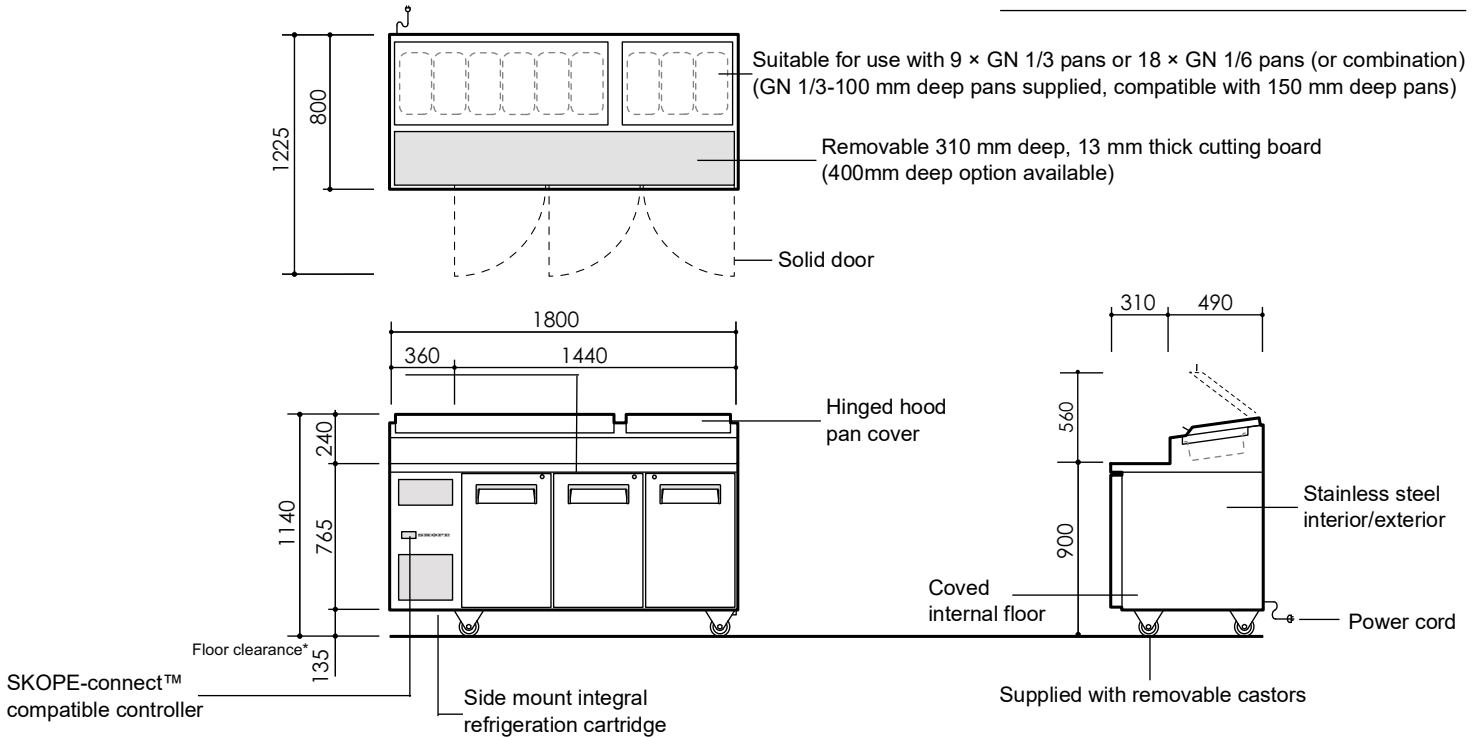

<b>CABINET</b>	
Doors	3 × self-closing, lockable, solid swing doors with stay-open position at over 90°, hinged LH, LH, RH
Internal door opening	3 × door openings: 590 mm high × 370 mm wide
Shelves	6 × adjustable height shelves. Middle shelves: 475 mm wide × 610 mm deep. Outer shelves: 415 mm wide × 610 mm deep. Each shelf is held in place with 4 × shelf clips. Additional shelf clips are available on request.
Worktop	Removable, food grade, 13 mm plastic cutting board
Material	304 AISI stainless steel interior and exterior
<b>PERFORMANCE</b>	
Max. ambient temperature	40°C (lid(s) closed), or 30°C (lid(s) open)
Temperature range	1°C to 5°C (adjustable with SKOPE-connect™ -2°C to 15°C)
Total energy consumption	6.45 kWh/24 h (@ 30°C/55% relative humidity)
Annual running cost	\$597 p.a. (@ \$0.30/kWh)
<b>ELECTRICAL</b>	
Electrical safety climate class	5 (40°C/40% relative humidity)
Interior lighting	2 × 400 mm, 4W LED lights (door activated)
Power cord	Supplied with a 10 amp plug and 2 m lead
Power supply	220-240 volts a.c. 50 Hz, single phase supply
Current draw	3.5 amps (includes unit 2.2 amps)
<b>REFRIGERATION</b>	
Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Side-mounted, integral, removable refrigeration cartridge (part number ULQCNI-0030)
Refrigerant	R290/90 g (natural refrigerant)
Nominal capacity	900 watts
Heat rejection (Avg./peak)	230 watts/290 watts
Drainage	No plumbing required in standard applications. If lids are left open for more than 4 hours per day, or venues have high or fluctuating ambient temperatures and humidity, SKOPE recommends connecting condensate to an in-floor drain.

DIMENSIONS		
	External	Internal
Height	1140 mm	605 mm
Width	1800 mm	1350 mm
Depth	800 mm	640 mm
Floor area	1.44 m <sup>2</sup>	
Weight	212 kg	
Gross volume	523 L	

Height variation	
Supplied castors	1140 mm
Height adjustable legs	1150 to 1200 mm
No castors	1005 mm

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5 mm	
More than 1 metre	-5 mm to +10 mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	+15 mm

Ventilation requirements	
Top	Not required
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2020 SKOPE Industries Limited

#### SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673  
Email: skope@skope.com, Website: www.skope.com

PSS0668 Rev. 1.9 May 2023

