

# TW

## Undercounter Traywasher

**W 865mm x D 660mm x H 845mm**

Washtech's TW is a powerful, highly durable, simple-to-use and easy-to-maintain undercounter traywasher. With an oversized internal chamber and dual wash and rinse systems, the TW will wash baking trays, mixing bowls, dishes, cutlery and cups much more efficiently and hygienically than manual cleaning processes.

The TW features Washtech Hybrid Controls which combine stainless steel IP65 switches and tried-and-tested switchgear with a bulletproof and customisable electronic timer.


Since 1981 Washtech commercial dishwashers have been constructed from heavy duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, you can rely on your Washtech.

### Standard Features

- Versatile 2 and 4 minute cycles
- Large internal wash chamber with useable area of W 800mm x D 545mm x H 470mm
- Low hot water consumption of 3.3 litres per cycle
- Washtech Hybrid Controls
- Heavy duty stainless steel construction
- QuikConnect (Plug & Play) installation, supplied complete with:
  - Water supply hose
  - Dual detergent and rinse aid pumps with injector lines and chemical level sensors
  - Drain pump with outlet hose
  - 15 amp plugset
  - No commissioning required
- Robust stainless steel wash and rinse arms with precision stainless steel jets
- Low chemical alarm lights and priming switches
- Triple heavy duty stainless steel filtration system including dual scrap trays, wash inlet filter and drain filter
- Hands-free AutoDrain
- Comprehensive 5-2-1 warranty


### Includes:

- 1 x 600 70028 - 500mm dish rack
- 1 x 600 70029 - 500mm cup rack
- 2 x C660503 - cutlery container
- 1 x 36110030 - TW carriage



# TW

Undercounter Traywasher  
W 865mm x D 660mm x H 845mm

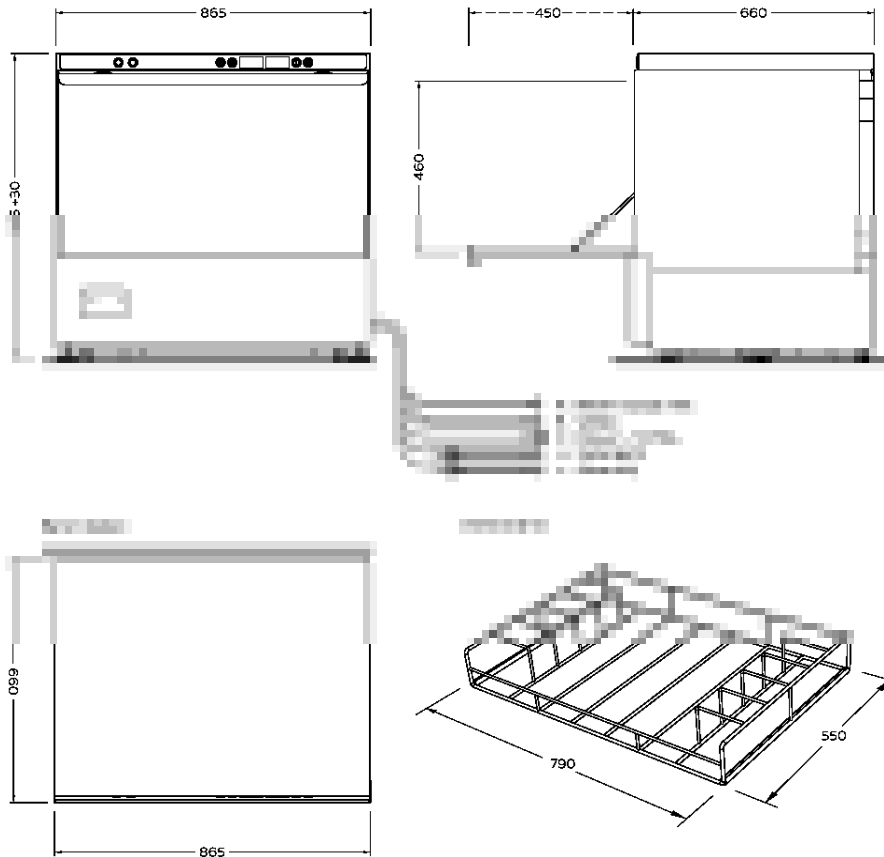

**MOFFAT**

moffat.com.au

**Australia**  
Moffat Pty Limited

**Victoria/Tasmania**  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9158 3833  
vsales@moffat.com.au

**New South Wales**  
Telephone 02-8833 4111  
nswsales@moffat.com.au

**South Australia**  
Telephone 03-9518 3888  
vsales@moffat.com.au

**Queensland**  
Telephone 07-3630 8600  
qldsales@moffat.com.au

**Western Australia**  
Telephone 08-9202 6820  
wasales@moffat.com.au



**ISO9001**  
All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd  
Version: 1901

|                            |              |   |           |                |                      |                |                 |        |     |     |
|----------------------------|--------------|---|-----------|----------------|----------------------|----------------|-----------------|--------|-----|-----|
| <b>A Hot water</b>         | Temperature  | 65°C  |           |                | <b>Dimensions</b>    | <b>Machine</b> | <b>Packed</b>   |        |     |     |
|                            | Connection   | 3/4" male; hose supplied  |           |                |                      |                |                 | Width  | 865 | 980 |
|                            | Pressure     | 200-350kPa  |           |                |                      |                |                 | Depth  | 660 | 800 |
|                            | Flow         | 20 litres per min   |           |                |                      |                |                 | Height | 845 | 990 |
|                            | Quality      | Potable - refer table   |           |                |                      |                |                 | Weight | 95  | 111 |
| <b>Backflow Prevention</b> | Consumption  | Atmospheric Vacuum Breaker  |           |                | Cubicmetres          |                | 0.78            |        |     |     |
|                            |              | 3.3 litres per cycle  |           |                | <b>Water Quality</b> | <b>Min</b>     | <b>Max</b>      |        |     |     |
| <b>B Waste</b>             | Connection   | Hose supplied for 38mm open standpipe 750 high or connection to sink trap |           |                |                      | pH             | 7               | 8      |     |     |
|                            |              |   |           |                |                      | Hardness ppm   | 20              | 100    |     |     |
| <b>C Electrical</b>        |              | <b>V</b>  | <b>Hz</b> | <b>A/phase</b> |                      | <b>max kW</b>  | Cl-             | 100    |     |     |
|                            | Single Phase | 240   | 50        | 15             |                      | 3.75           | SO <sub>4</sub> | 400    |     |     |
|                            |              |   |           |                |                      |                | Fe              | 0.1    |     |     |
|                            |              |   |           |                |                      |                | Mn              | 0.5    |     |     |
|                            |              |   |           |                |                      |                | Cu              | 0.05   |     |     |
|                            |              |   |           |                |                      |                | Cl <sub>2</sub> | 0.1    |     |     |

Refer operator manual for installation instructions. Isolating switch must be within 1m of, and not directly behind the machine. Power supply MCB should be rated 20% higher than the current rating of the machine. Isolating water valve must be readily accessible.

\*Consumption may vary with site conditions.

an Ali Group Company



The Spirit of Excellence