

XV

Economy Undercounter Dishwasher – 365/450mm rack W 535mm x D 595mm x H 845mm

The Washtech XV is a compact and efficient undercounter dishwasher that is simple to use and easy to maintain. With a powerful wash pump and commercial grade rinse heating system, the XV provides great wash results and consistent hot water (>82°C) sanitisation every cycle.

With a world class water consumption rate of just 2.2L per cycle, the XV provides excellent wash results with short cycle times, while being economical to run and environmentally friendly. It also features Washtech's hybrid control system – combining IP65 stainless steel switches with tried-and-tested mechanical switchgear and a customisable electronic timer – which ensures long term durability and reliability.


Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech XV will not let you down.

Standard Features

- 60 and 120 second cycles
- Capacity of up to 960 glasses / 840 plates per hour
- Low water consumption of 2.2 litres per cycle
- Compatible with 450mm racks
- Powerful 0.5HP dishwasher grade wash pump
- Heavy-duty stainless steel construction
- Washtech hybrid controls
- Quick connection including:
 - Water supply hose
 - Detergent and rinse aid pumps with injector lines
 - Drain pump with outlet hose
 - 15 amp plugset
- Upper and lower wash/rinse arms with precision moulded jets
- Easy-clean composite wash filter
- Watermark approved backflow prevention
- Moffat's comprehensive 5-2-1 Warranty

Includes:

- 1 x 450mm dish rack (600 70081)
- 1 x 450mm cup rack (600 70080)
- 1 x cutlery container (C660503)



XV



moffat.com.au
washtech.com.au

Moffat Pty Limited

VIC/TAS/SA

70 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Fax 03-9518 3833
vsales@moffat.com.au

NSW

Telephone 02-8833 4111
nswsales@moffat.com.au

QLD


Telephone 07-3630 8600
qldsales@moffat.com.au

WA

Telephone 08-9413 2400
wasales@moffat.com.au

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
Version: WXV0020 2104

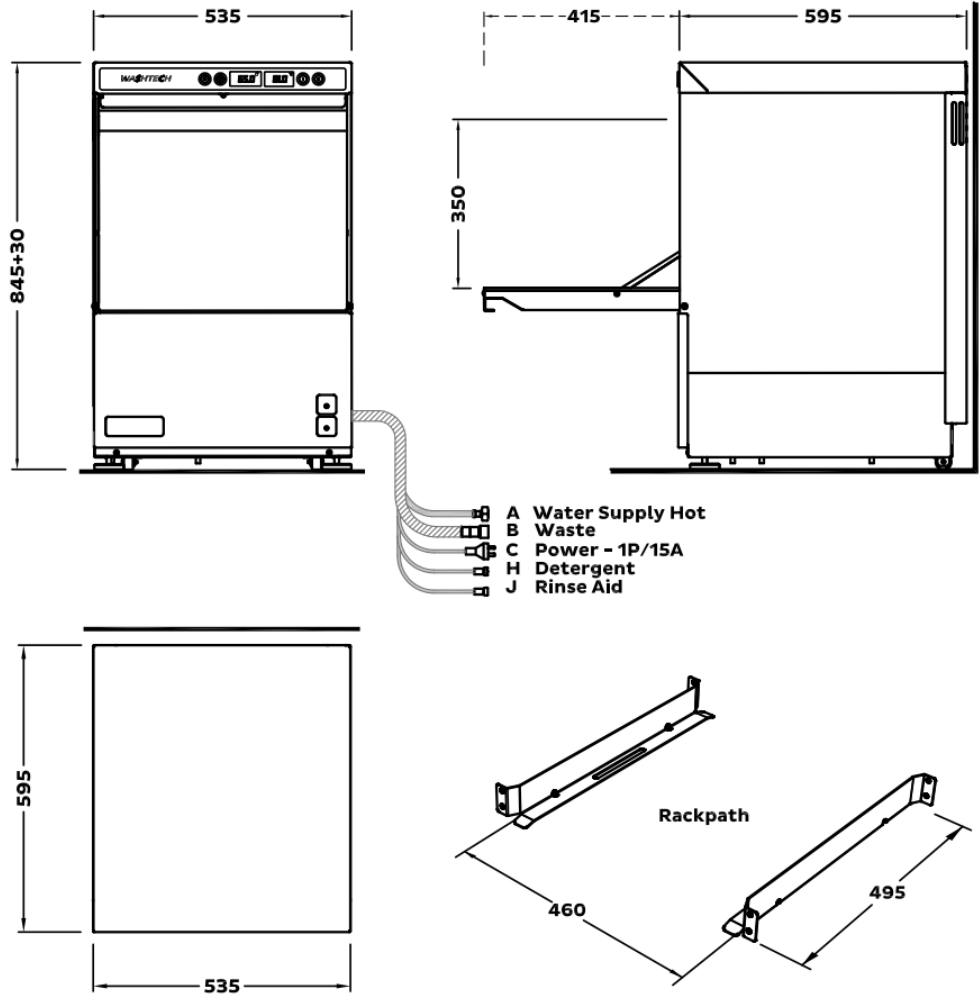

A - Hot Water

Temperature 65°C
 Connection 3/4" male; hose supplied
 Pressure 200-350kPa
 Flow 20 litres per min
 Quality Potable - refer table
 Backflow Prevention AVB
 Consumption 2.4 litres per cycle

B - Waste

Connection Hose supplied for 38mm open standpipe 750mm high or connection to sink trap

C - Electrical	V	Hz	A/phase	Max kW
Single phase	240	50	15	3.37

Dimensions

	Machine	Packed
Width (mm)	535	645
Depth (mm)	595	610
Height (mm) **	845	970
Weight (kg)	66	83
Volume (m ³)		0.38

Water Quality

	Min	Max
pH	7	8
Hardness (ppm)	20	100
Cl ⁻		100
SO ₄		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl ₂		0.1

Isolating switch must be within 1m of, and not directly behind the machine.

Refer to operator manual for installation instructions.



an Ali Group Company



The Spirit of Excellence

