

Merrychef Rapid High Speed Cook Oven

eikon® e1s



Standard Features


- Compact 407mm wide footprint – fits on a 500mm bench depth
- Plug & Play – single 15A power supply
- Oven cavity to suit up to 306mm x 308mm / 12" plate size
- Best in class energy efficiency – less than 0.7kWh in standby mode
- Rapid cooking up to 10-12 times faster than a conventional oven
- Rapid cooking technology combines three heat technologies: tuned impingement, microwave and convection heat
- Ventless cooking capabilities through built in catalytic converter
- Fast heat up and cool down
- Colour easyTouch® icon driven touch screen control panel with the capability of storing up to 1024 multi-stage recipe programs
- Each program offers up to six (6) stage with programmable cooking times, microwave power setting and user instructions for each stage
- Easy menu updates or data transfer via USB
- Built in diagnostic testing
- Optimum time management with automatic On & Off timers
- Precise temperature setting range from 100°C – 260°C
- Quiet operation – 52dbA in standby mode
- Black exterior on stainless steel
- Cool to touch exterior allows for zero space at the sides and back
- Easy access to front mounted air filter
- Easy to clean cavity with large rounded edges

Includes

- Solid cook plate
- Guarded paddle with sides
- Cook plate liner
- Solid base basket
- Cleaning care package, consisting of:
 - 1x oven cleaner (bottle)
 - 1x oven protector (bottle)

Accessories

- Baskets
- Cook plates
- Cook plate liners
- Paddles
- Racks

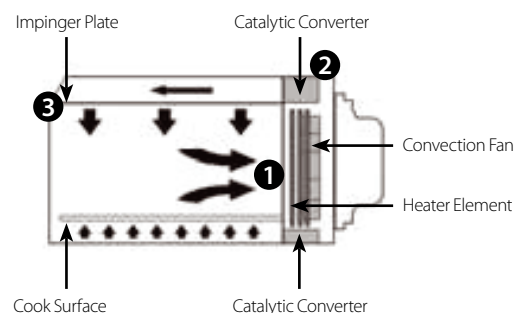


How it works

The convection fan pulls air in through the back of the cavity (1). This is then heated and returned to the cavity through the catalytic converters (2) and impinger plate (3) to produce an even heat pattern in the oven. This heat pattern allows food to cook evenly and produces a crisp golden finish every time.

Merrychef Rapid High Speed Cook Oven

eikon® e1s

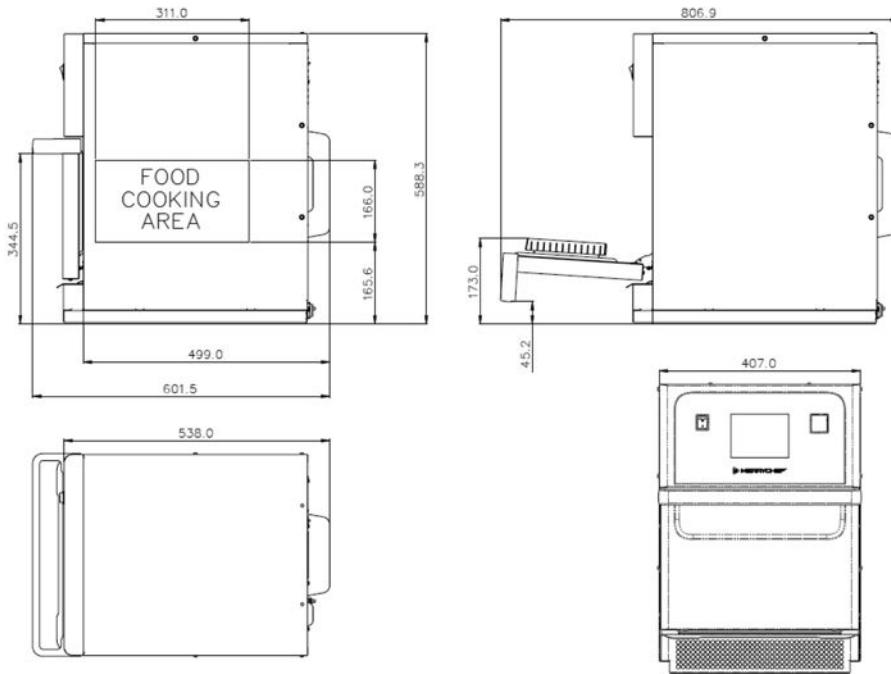

MOFFAT®

Australia
moffat.com.au

New Zealand
moffat.co.nz

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Ph 03-9518 3888
Fax 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Ph 02-8833 4111
nswsales@moffat.com.au

South Australia
Ph 03-9518 3888
vsales@moffat.com.au

Queensland
Ph 07-3630 8600
qldsales@moffat.com.au

Western Australia
Ph 08-9413 2400
wasales@moffat.com.au

New Zealand
Moffat Limited

Christchurch
45 Illinois Drive
Izone Business Hub
Rolleston 7675
New Zealand
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Auckland
Ph +64 9-574 3150
sales@moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
AN.MC.1810



MICROWAVE POWER

Microwave settings, off or 5-100% in 1% increments
Distribution system, rotating active antennae

CONVECTED HEAT

Temperature settings OFF and from 100° to 260°C
in 1°C steps
Distribution system, Tuned Impingement

DIMENSIONS

Width	407mm
Depth	538mm
Height	588mm
Weight	46kg

PACKED DIMENSIONS

Width	774mm
Depth	604mm
Height	719mm
Weight	61kg

INSTALLATION REQUIREMENTS

Rear	0 mm
Right	0 mm
Left	0 mm
Top	50 mm

INSTALLATION REQUIREMENTS

For precise installation instructions please refer to the units installation manual

ELECTRICAL SUPPLY

Single phase model
230-240V, 50Hz (1P + N + E)
Rated power consumption 2.99 kW
Rated current 15A
All Merrychef ovens require installing a type D circuit breaker for all installations.

POWER OUTPUT (APPROX.)

Microwave	0.8kW
Convected heat	2.2kW
Combination mode	0.8** + 0.9kW

** This is approximate microwave power output.

an Ali Group Company



The Spirit of Excellence