


# specifications

## RF7.UBR.3.GD

ReFlex Series, 3 Glass Door, Underbench Fridge

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

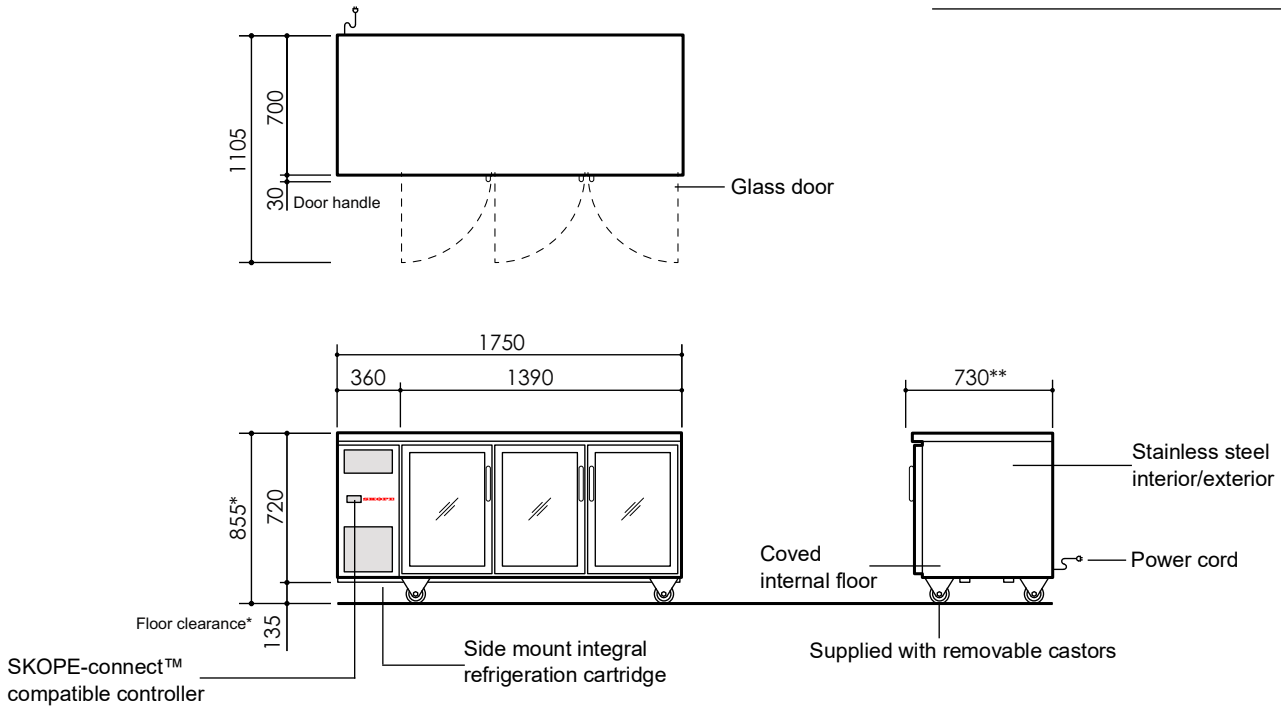

### CABINET

Doors	3 × self-closing, lockable, double glazed, double low-e, glass swing doors. LH, LH, RH
Internal door opening	3 × door openings: 560 mm high × 360 mm wide
Shelves	6 × adjustable height shelves. <ul style="list-style-type: none"> <li>• 2 × middle shelves: 455 mm × 510 mm deep.</li> <li>• 4 × outer shelves: 395 mm wide × 510 mm deep.</li> </ul> <p>Note: Bottom shelves supplied floor mounted, additional shelf clips are available on request.</p>
Worktop	Total thickness 45 mm (0.7 mm 304 AISI stainless steel over insulating cyclopentane foamed core)
Material	304 AISI stainless steel interior and exterior

### PERFORMANCE

Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable with SKOPE-connect™ -2°C to 15°C)
GEMS class	4M1
GEMS energy consumption	3.77 kWh/24 h
GEMS annual running cost	\$413 p.a. (@ \$0.30/kWh)

### ELECTRICAL

Electrical safety climate class	5
Interior lighting	2 × 400 mm, 4W LED lights
Power cord	Supplied with 10 amp plug and 2 m lead
Power supply	220-240 volts a.c. 50 Hz, single phase supply
Current draw	2.0 amps (includes unit 1.5 amps)

### REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Side mounted, integral, removable refrigeration cartridge (part number ULKCN1-0028)
Refrigerant	R290/95 g (natural refrigerant)
Nominal capacity	650 watts
Heat rejection (Avg/peak)	160 watts/185 watts
Drainage	No plumbing required

### DIMENSIONS

	External	Internal
Height	855 mm*	570 mm
Width	1750 mm	1280 mm
Depth	730 mm**	530 mm
Floor area	1.28 m <sup>2</sup>	
Weight	135 kg	
Gross volume	387 L	
Net volume	319 L	

\* With supplied castors fitted. See height variation below

\*\* Includes 30 mm door handle

#### Height variation

Supplied castors	855 mm
Height adjustable legs	865 mm to 905 mm
No castors or legs	720 mm

#### Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5 mm	
More than 1 metre	-5 mm to +10 mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	+15 mm

#### Ventilation requirements

Top	Not required
Sides	Not required
Back	Not required
Bottom	Not required