

# specifications

## OD260

### Open Deck Fridge


#### CABINET DIMENSIONS

|                     | External                                  | Internal  |
|---------------------|---|-----------|
| <b>Height:</b>      | 1400mm                                    | 850-910mm |
| <b>Width:</b>       | 650mm                                     | 565mm     |
| <b>Depth:</b>       | 735mm                                     | 495-595mm |
| <b>Floor area:</b>  | 0.48m <sup>2</sup> (includes rear spacer) |           |
| <b>Gross volume</b> | 230L                                      |           |

#### Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

| Linear dimensions | Overall cabinet dimensions | Length of multiple cabinets |                  |
|-------------------|----------------------------|-----------------------------|------------------|
|                   |                            | At each joint               | At each end wall |
| Less than 1 metre | ±5mm                       | ±5mm                        | +15mm            |
| More than 1 metre | -5mm to +10mm              | -5mm to +10mm               | +15mm            |

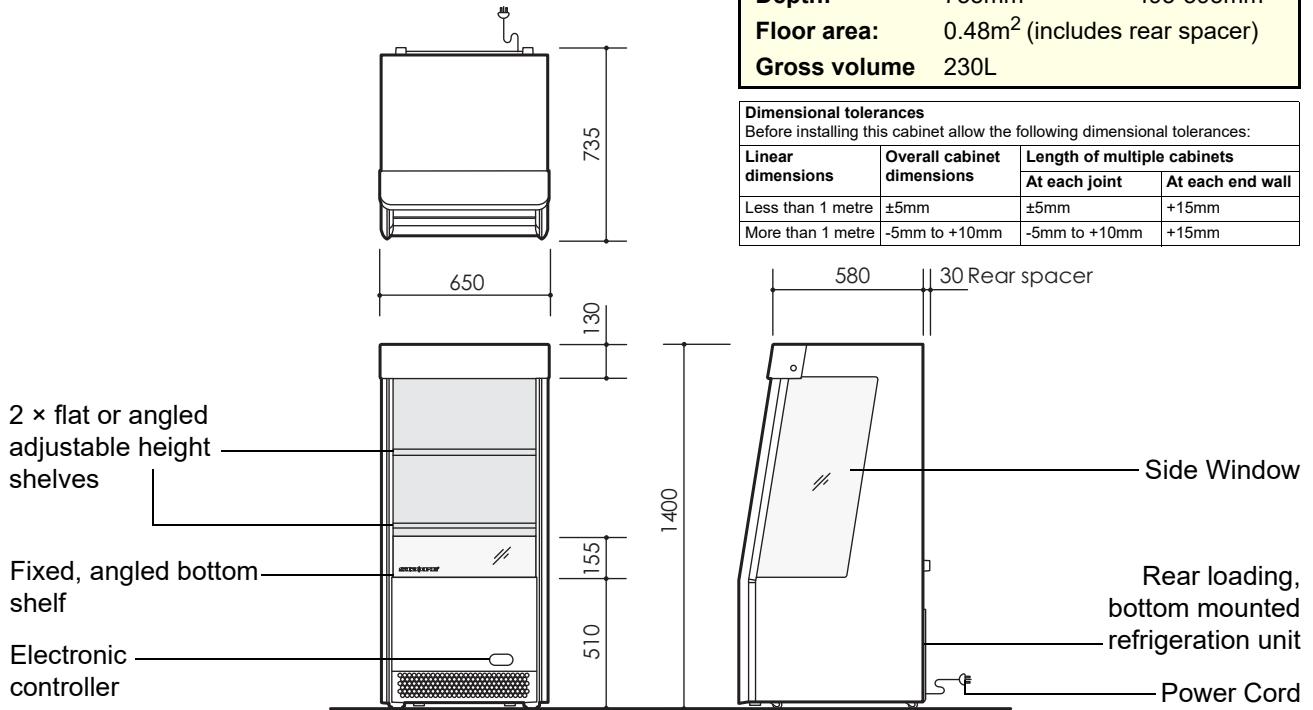

#### CABINET SPECIFICATIONS

|  |   |
|--|---|
| <b>Doors:</b>                          | n.a.  |
| <b>Shelves:</b>                        | 2 x adjustable height shelves and 1 x fixed bottom shelf. Top shelf: 545mm wide x 296mm deep. Middle shelf: 545mm wide x 371mm deep. Bottom shelf: 545mm wide x 442mm deep. |
| <b>Weight:</b>                         | 140kg   |
| <b>Electrical safety climate class</b> | 3   |
| <b>Internal lighting:</b>              | 2 x 9 Watt LED strip side lights (18 Watts total)   |
| <b>Sign lighting:</b>                  | n.a.  |
| <b>Electrical:</b>                     | 220-240 Volts a.c. 50 Hz, single phase supply, 3.2A (includes unit 3.0A)  |
| <b>Temperature range:</b>              | 1°C to 5°C (2°C to 4°C product mass average)  |
| <b>GEMS class</b>                      | M1  |
| <b>GEMS energy consumption</b>         | 8.30 kWh/24h  |
| <b>GEMS annual running cost</b>        | \$909 p.a. (@ \$0.30/kWh)   |
| <b>Refrigeration system:</b>           | Electronically controlled, bottom mounted SKOPE refrigeration unit (unit part number UB89ABF)   |
| <b>Electronic controller:</b>          | Carel S4 Evo  |
| <b>Refrigerant:</b>                    | R134a / 420g  |
| <b>Nominal capacity:</b>               | 815 Watts   |
| <b>Drainage:</b>                       | No plumbing required  |

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2017 SKOPE Industries Limited

PSS0498 Rev. 1.2 Mar. 2021



**SKOPE INDUSTRIES LIMITED**

New Zealand Freephone: 0800 947 5673, Australian Freephone: 1800 121 535

Email: skope@skope.com Website: www.skope.com

